


05/23/00

05/23/00

PTO
09/575984
05/23/00

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>		Attorney Docket No. 5244-0127-2
		First Inventor or Application Identifier Alan LIN
Title		SYSTEM, METHOD, AND COMPUTER PROGRAM PRODUCT FOR REMOTE MANAGING A DOCUMENT SERVER PRINT JOB

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents</i>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification Total Pages 18</p> <p>3. <input checked="" type="checkbox"/> Formal Drawing(s) (35 U.S.C. 113) Total Sheets 8</p> <p>4. <input checked="" type="checkbox"/> Oath or Declaration Total Pages 2</p> <p>a. <input checked="" type="checkbox"/> Newly executed (original or copy)</p> <p>b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed)</p> <p>i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation By Reference (usable if box 4B is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4B, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	ACCOMPANYING APPLICATION PARTS
15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application no.: Prior application information: Examiner: Group Art Unit:	
16. Amend the specification by inserting before the first line the sentence: <input type="checkbox"/> This application is a <input type="checkbox"/> Continuation <input type="checkbox"/> Division <input type="checkbox"/> Continuation-in-part (CIP) of application Serial No. Filed on <input type="checkbox"/> This application claims priority of provisional application Serial No. Filed	
17. CORRESPONDENCE ADDRESS OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C. FOURTH FLOOR 1755 JEFFERSON DAVIS HIGHWAY ARLINGTON, VIRGINIA 22202 (703) 413-3000 FACSIMILE: (703) 413-2220	

Name:	Gregory J. Maier	Registration No.:	25,599
Signature:		Date:	May 23, 2000
Name:	Philippe J. C. Signore	Registration No.:	43,922

GJM:PJCS:les

5244-0127-2
RSID 1-313
AP00-142

TITLE OF THE INVENTION

5 SYSTEM, METHOD, AND COMPUTER PROGRAM PRODUCT FOR REMOTE
 MANAGING A DOCUMENT SERVER PRINT JOB

BACKGROUND OF THE INVENTION

Field of the Invention

10 The present invention is directed to document printing systems, methods of printing,
 and computer program products for managing print jobs.

Discussion of the Background

 The ability to print documents from a computer has become so widespread that our
 society is increasingly becoming dependent on that ability. Small, large, and virtual
 businesses, educational centers, and government agencies all rely on that ability.

15 In home offices, printers are typically connected directly to a computer. In larger
 offices, printers are often connected to a network, to which other printers and a number of
 computers may be connected. The network may be an internal network located inside an
 office or business, or may be a publically accessible network, such as the Internet, or a
 combination of both. Figure 1 shows an illustration of a printing system with a printer 10
20 connected to a network L1, to which computers 20 are connected.

 Independent of whether printers are connected directly to a computer, or connected to
 a network, printers can work in several different modes depending on the user's specific
 needs. For example, a printer can work in a "normal" mode in which a document is printed
 by the printer as soon as the printer is available for printing. In another mode, called the
25 "document server" mode, the user sends a document server print job ("print job") to the
 printer which holds it in memory until a file name and password is entered using the front
 panel of the printer. This "document server" mode may be useful, for example, when the
 printer is located far away from the computer. The user, who just sent a print job to the

printer, may not want the printer to print until the user arrives at the printer. In the "document server" mode, the user may thus prevent others from reading a confidential document or misplacing the user's printout. In this mode, the user also has the flexibility to check that the printer has enough paper before starting to print a large file, or to load the printer with a special paper, e.g., color paper or transparencies. The "document server" mode is therefore a popular mode of using a printer.

Figure 2 illustrates a block diagram of a conventional "document server" system. The user computer 20 includes an operating system (OS) 30 which interacts with a printer driver 40 so as to enable a user to send a print job to the printer 10 via a connection L1. The connection L1 can be a cable connected to the printer 10 and to an I/O controller/printer port (not shown) of computer 20. Alternatively, the connection L1 can be a network connecting the printer 10 to a communication controller/network card (not shown) of the computer 20. The printer driver 40 is a software interface permitting interaction between a specific printer and a specific operating system. The operating system 30 sends signals in accordance with instructions from the printer driver 40 to a printer port and/or network card (not shown), thus sending signals corresponding to the document or other item to be printed to the printer 10 via the connection L1.

The printer driver 40 can provide, for example, graphical user interfaces 400 and 500, as shown in Figs. 3 and 4, respectively, which are conventional and well-known to those of ordinary skill in the art. In Fig. 3, the "Set up" graphical user interface 400 permits the user to select a job type or mode, for example by selecting "Document Server" on a "Job Type" drop-down menu 410. The user may also set a variety of printing attributes, such as a print job orientation using an "Orientation" drop-down menu 420, or a paper size using a "Paper Size" drop-down menu 430. The user may then select an "OK" push button 440 and/or an "Apply" push button 460. The "OK" push button 440, "Cancel" push button 450 and "Apply" push button 460 are well known in the art and are default push buttons supplied with a window programming package, such as a window program package sold under the trademark VISUAL BASIC, or other window system.

In Fig. 4, the "Statistics" graphical user interface 500 permits the user to enter a file name in a "File Name" window 510 and a password in a "Password" window 520, the file

name and password being associated with the print job sent to the printer 10. A user code can also be entered in a "User Code" window 530 of the graphical user interface 500.

Returning to Fig. 2, the printer 10 includes a printer controller 50, which receives and holds the print job in memory. A front panel 60 permits the user to enter a file name and a password which the printer controller 50 matches with the file name and password entered with the graphical user interface 500. Upon matching, the printer controller 55 instructs the printing mechanism 70 to execute the print job.

Although the "document server" mode is popular, conventional systems capable of implementing the "document server" mode have an important drawback: once a first print job is sent to the printer 10, the user cannot change the printing attributes of the first print job from the user's computer. In conventional systems, the user has to send a second, updated print job and either cancel the first print job using the front panel of the printer or print out the first print job before printing out the second, updated print job. The present inventor has determined that this lack of flexibility in changing printing attributes from the user's computer leads to inefficiencies and loss of time and resources.

SUMMARY OF THE INVENTION

Accordingly, one object of the present invention is to solve the above-noted problems and to increase the flexibility in managing a document server print job.

Another object of the present invention is to provide a method and a system for managing a document server print job which is capable of remotely managing a document server print job from a user computer.

Yet another object of the present invention is to provide a computer program product, which remotely manages a document server print job from a user computer.

Still another object of the present invention is to provide a graphical user interface which may be included with the computer program product.

Another object of the present invention is to provide a method of managing a document server print job using a computer program product which remotely manages a document server print job from a user computer.

To achieve these and other objects, the present invention provides a system that includes a database configured to store print job information; and a remote manager

configured to 1) access the print job information from the storage device, 2) provide a first graphical user interface prompting a user to enter identification information, and 3) compare the identification information with information stored in the storage device. The remote manager may be further configured to 4) provide a second graphical user interface displaying at least part of the print job information upon validation of the identification information, and 5) update the storage device with print job information edited with the second graphical user interface. The remote manager resides on a computer along with a printer driver and an operating system. A printer is connected to the computer via a connection which may include a network. The print job information edited with the second graphical user interface is transmitted to the printer, which includes a printer controller configured to store printing information and configured to replace a first set of printing information with a second set of printing information when the second set includes a same identification information as the first set. The printer includes a printing mechanism configured to print according to the print job information edited using the remote manager.

The remote manager is typically a computer program, which receives data output from a database or from a user through the graphical user interfaces, transforms the received data in some desired way, and then outputs the transformed data stream to the printer driver.

The present invention also provides a graphical user interface to assist a user in operating the computer program. In particular, the graphical user interface according to the present invention includes a plurality of pop-up menus having various display controls to control the operation of the computer program.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram showing an overall system configuration according to the present invention;

Figure 2 is a block diagram illustrating a conventional printing system;

Figure 3 is an example of a graphical user interface that can be implemented in the present invention;

Figure 4 is an example of a graphical user interface that can be implemented in the present invention;

Figure 5 is a block diagram illustrating a printing system according to the present invention;

Figure 6 is a block diagram showing the various components of a computer according to the present invention;

Figure 7 is an example of a graphical user interface that can be implemented in the present invention;

Figure 8 is an example of a graphical user interface that can be implemented in the present invention;

Figures 9A-B show a flowchart illustrating a method of managing a print job according to the present invention;

Figure 10 is a flowchart illustrating the method of printing according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, wherein like reference numerals designate identical or corresponding parts throughout the several views, Figure 5 is a block diagram illustrating a printing system according to the present invention. The system includes at least one computer 25 which may be implemented as a personal computer and is connected to a printer 15 via a connection L1. In one embodiment, the connection L1 is a conventional printer cable, as well-known in the art.

In another embodiment, the connection L1 is a network, so that an overall printing system according to the present invention is similar to the system shown in Fig. 1. In this network embodiment, the connection L1 may be a local area network (LAN), a wide area network (WAN), an intranet or extranet, either of which may include at least a portion of a publically accessible network, such as the Internet. Local area networks are well-known in the art and are explained for example in chapter 37 of "How Computers Work", by Ron White, Que Corporation, pps. 340-349, September, 1999, ISBN: 0-7897-2112-0, the entire content of this book being hereby incorporated by reference. Further, the manner of connecting the computer 25 to a network is known and can be accomplished in any desired manner. A virtual private network (VPN) may be used as well for the network L1. Other

communications links such as a wireless link including links such as radio frequency and infrared may be used as well.

Returning to Fig. 5, the printer 15 includes a printer controller 55, which controls the print job received from the computer 25. The printer 15 also includes a front panel 60, which allows users to enter a file name and a password, and a printing mechanism 70, which is configured to execute the print job based on the controller 55's instructions. The printing mechanism 70 may include, for example, a laser, color, black/white, dot matrix, impact, ink-jet printing or other desired printing engine. The printer controller 55 may include a conventional memory or hard drive to hold the print job until a user enters the file name and password corresponding to the print job.

The computer 25 includes an operating system 30, for example Windows NT 2000, available from Microsoft, Inc. Other operating systems can be used, for example, Window 98, DOS, Unix, System 8, or Linux. A variety of software applications may be hosted on the operating system 30, for example word processors, spreadsheets, presentation processors, graphic software, accounting software, or any other application that produces documents to be printed. The computer 25 also includes a printer driver 40, which is a software interface permitting interaction between a specific printer and a specific operating system of application program. The operating system 30 sends signals in accordance with instructions from the printer driver 40 to a printer port and/or network card (not shown), thus sending signals corresponding to the document or other item to be printed to the printer 15 via the connection L1.

Advantageously, the computer 25 also includes a print job remote manager 80, which permits a user to interact with the printer driver 40 and the operating system 30 so as to remotely manage the document server print job sent to the printer manager 55. The details of print job remote manager 80 are further described below. The computer 25 also includes a database 90 within a storage device configured to hold file names, passwords, and printing attributes. Any storage device may be used to store the database 90 including, for example, a hard disk drive, a random access memory, a nonvolatile memory, or any other type of memory. When a new file name and password are entered, for example via the graphical user interfaces 400 or 500, the information is sent to the database 90 by the print job remote manager 80. In other words, the print job remote manager 80 is configured to access the

database 90. When the printing attributes of a specific print job are changed via the print job remote manager 80, the database 90 is updated to reflect those changes by print job remote manager 80. In one embodiment, if a user enters a file name via the graphical user interface 500, with a password and a first set of printing attributes using graphical user interface 400, the information is stored in the database 90. At a later time, the user may enter, using graphical user interfaces provided by the print job remote manager 80 as discussed below, the same file name with the same password but with a second set of printing attributes using the print job remote manager 80. The print job remote manager 80 updates the database 90 so that the second set of printing attributes overrides the first set.

In one embodiment of the present invention, the printer controller 55 is configured to replace a first set of printing attributes with a second set of printing attributes when the second set is associated with the same identification information, e.g., the same file name and same password, as the first set. Accordingly, a user is able to manage the print jobs already sent to the printer 15 without having to go to the printer 15 and enter instructions on the front panel 60. Using the print job remote manager 80 of the present invention, the user may edit the print job from the user computer 25. The print job remote manager 80 thus increases the flexibility of a document server printing system.

The database 90 is a digital repository that may be implemented, for example, through a commercially available relational database management system (RDBMS) based on the structured query language (SQL) such as ORACLE, SYBASE, INFORMIX, or MICROSOFT ACCESS, through an object-oriented database management system (ODBMS), or through custom database management software. In one embodiment, the database 90 contains all information of interest for printing a print job. For example, the database 90 includes the file names, the passwords, the user codes and the printing attributes for each print job sent to printer 15. The database 90 may reside on a storage device of computer 25, or reside on another device connected to computer 25, for example, by way of a local area network L2 (not shown) or other communications link such as a virtual private network, wireless link, or Internet-enabled link.

The computer 25 can be a personal computer, a portable computer, a computer workstation with sufficient memory and processing capability, or any device configured to work like a computer. In one embodiment, the computer 25 is a device as diagrammatically

shown in Figure 6. In this embodiment, the computer 25 includes a central processing unit 100 (CPU) that communicates with a number of other devices by way of a system bus 150. The computer 25 includes a random access memory (RAM) 190 that stores temporary values used in implementing the print job remote manager 80's managing of printing information and the database 90's storing of printing information.

The central processing unit 100 is configured for high volume data transmission and performing a significant number of mathematical calculations in processing communications and database searches. A Pentium III microprocessor such as the 1GHz Pentium III manufactured by Intel Inc. may be used for CPU 100. This processor employs a 32 bit architecture. Other suitable processors include the Motorola 500 MHZ PowerPC G4 processor and the Advanced Micro Devices 1GHz AMD Athlon processor. Multiple processors or workstations may be used as well.

The ROM 180 is preferably included in a semiconductor form although other read-only memory forms including optical media may be used to host application software and temporary results. The ROM 180 connects to the system bus 150 for use by the CPU 100. The ROM 180 includes computer readable instructions that, when executed by the CPU 100, perform different functions associated with printing and remotely managing print jobs. An input controller 160 connects to the system bus 150 and provides an interface with various peripheral equipment including a keyboard 161 and a pointing device such as a mouse 162, so as to permit user interaction with graphical user interfaces 400, 500, 600 and 700. The input controller 160 may include different ports such as a mouse port in the form of a PS2 port or, for example, a universal serial bus (USB) port. The keyboard port for the input controller 160 is in the form of a mini-DIN port although other connectors may be used as well. The input controller 160 provides sound card connections so that external jacks on the sound card allow users to attach microphone speakers or an external sound source. The input controller 160 also may include serial ports or parallel ports as well.

A disk controller 140 is in the form of an IDE controller and connects via ribbon cables to a removable media drive 141 which may be implemented as a floppy disk drive, as well as a hard disk drive 142 and a CD-ROM drive (not shown). In addition, a PCI expansion slot is provided on the disk controller 140 or mother board that hosts the CPU 100. An enhanced graphic port expansion slot is provided and provides 3-D graphics with fast

access to the main memory. The hard disk 142 may also include a CD drive that may be readable as well as writeable. A communication controller 130 provides a connection to a network L1. The network L1 may be a connection to the public switch telephone network (PSTN) for providing Internet access, or to a local area network, wide area networks, a virtual private network (VPN), or an extranet. In one embodiment, the network L1 and the connection to the communication controller 130 are made by way of a plurality of connections including a cable-modem connection, DSL connection, fiber optic connection, dial-up modem connection, and the like that connect to the communication controller 130.

An input/output controller 120 also provides connections to external components such as an external hard disk 121, a printer 122, for example, by way of an RS 232 port and a SCSI bus. As noted above, the present invention is not limited to network connections, but can be implemented with a simple printer cable connection between a printer 15 (shown as printer 122 in Fig. 6) and computer 25.

A display controller 110 interconnects the system bus 150 to a display device, such as a cathode ray tube (CRT) 111. While a CRT is shown, a variety of other display devices may be used such as an LCD (liquid crystal display), or plasma display device. The display device permits displaying of graphical user interfaces 400, 500, 600 and 700.

Print job remote manager 80 is now described in more detail in connection with Figs. 7-9A-B.

Figure 7 shows a graphical user interface 600 provided by the print job remote manager 80 and displayed by the computer 25. The graphical user interface 600 includes a "File Name" window 610, in which a user enters a file name, and a "Password" window 620, in which a user enters a password. The entered file name is the identification information that identifies the user's print job. The password is included for security and allows a user to keep others from editing or printing the user's print job. The user may then select an "OK" push button 630 and/or an "Apply" push button 650. The "OK" push button 630, "Cancel" push button 640 and "Apply" push button 650 are well known in the art and are default push buttons supplied with a window programming package, such as window program package sold under the trademark VISUAL BASIC, or other window system.

As shown in Fig. 8, the print job remote manager 80 provides another graphical user interface 700 displaying at least part of the print job information at the computer 25. For

example, the graphical user interface 700 displays the orientation of the paper in an "Orientation" window 710; the layout of the print job in a "Layout" window 720; and a paper size in a "Paper Size" window 730. Using the graphical user interface 700, the user may change any of these printing attributes by entering the new attribute in the appropriate window. The new attribute may be typed in the appropriate window, or may be selected by highlighting a selection of a drop-down menu. The user may then enter the changes by selecting an "OK" push button 740, which is similar to the push button 630. The user may also keep the original settings, i.e., chose not to edit the printing attributes, by selecting a "Cancel" push button 750, which is similar to the "Cancel" push button 640.

Figures 9A-B illustrate a flowchart of the various functions performed by the print job remote manager 80. First, the print job remote manager 80 places print job information in the database 90 (step 800). This information may have been entered at the computer 25 using the graphical user interfaces 400 (Fig. 3), 500 (Fig. 3), 600 (Fig. 7) or 700 (Fig. 8). At step 810, the print job remote manager 80 provides the graphical user interface 600 (Fig. 7). At step 820, the print job remote manager 80 compares the identification information entered using the graphical user interface 600, for example the file name and password, with the information already entered in the database 90 (step 820). If the information does not match at step 825, the print job remote manager 80 may either end or request the user to reenter a file name and password (step 830). If the information matches at step 825, i.e. the print job remote manager 80 validates the identification information, the print job remote manager 80 provides at step 840 the graphical user interface 700 (Fig. 8) at the computer 25. The graphical user interface 700 displays at least part of the print job information corresponding to the identification information, for example, the orientation of the paper, the layout of the print job, and the paper size. The user may change any of these printing attributes by entering the new attribute in the appropriate window from the computer 25.

Selecting the "Cancel" push button 750 of the graphical user interface 700 (Fig. 8) causes the print job remote manager to end at step 850.

Selecting the "OK" push button 740 of the graphical user interface 700 (Fig. 8) causes the print job remote manager 80, printer driver 40 and operating system 30 to transmit the updated set of printing attributes to printer controller 55 at step 860. In one embodiment, upon receiving a second set of printing attributes associated with a same identification

information, e.g., same file name and password, the printer controller 55 is configured to cancel the first print job and to keep the second print job pending.

Selecting "OK" push button 740 of the graphical user interface 700 (Fig. 8) also causes the print job remote manager 80 to update the database 90 with the new set of printing attributes at step 870.

Fig. 10 illustrates an overall method of printing using the print job remote manager 80. At step 900, a user selects the "document server" mode for the printer, using for example the graphical user interface 400 (Fig. 3). At step 910 the user enters printing attributes, a file name and a password, using for example the graphical user interfaces 400 and 500 (Figs. 3 and 4). At step 920, the print job remote manager 80 sends the printing attributes, file name and password to the database 90 (see also step 800 of Fig. 9). The printing attributes, file name and password are also sent to printer controller 55.

If the user desires to print a document using the printing attributes at step 930, the user enters identification information, such as the file name and password, on the front panel 60 of the printer 15 at step 940. The document is then printed by the printing mechanism 70. If the user does not want to print the document at step 930, the user has the option to review the printing attributes of the print job at step 950. If the user does not wish to review the printing attributes, the printing sequence ends at step 960. If the user chooses to review the printing attributes, either after printing at step 940 or instead of printing, the print job remote manager 80 is run at step 970. The print job remote manager 80 then provides graphical user interfaces at computer 25, such as the graphical user interfaces 600 and 700 shown in Figs. 7 and 8, respectively (see also step 810 of Fig. 9). If the user edits the printing attributes at step 980, the edited printing attributes are sent to the database 90 and to the printer controller 55 at step 990 (see also steps 860 and 870 of Fig. 9). If the user wants to print the document using the edited printing attributes, the user enters identification information, such as the file name and password, on the front panel 60 of the printer 15 at step 940. If the user does not edit the printing attributes at step 980, the user can either print by going back to step 940, re-run print job remote manager 80 by going back to step 970, or end the printing sequence at step 960.

The above steps performed by the print job remote manager 80 according to the present invention may be implemented by a computer program product that may be hosted on a storage medium and include instructions that can be used to program a computer to perform

a process in accordance with the present invention. This storage medium can include, but is not limited to, any type of disk including floppy disks, optical disks, CD-ROM, magneto-optical disks, ROMs, RAMs, EPROMs, EEPROMs, Flash Memory, Magnetic or Optical Cards, or any type of media suitable for storing electronic instructions.

5 This invention may also be conveniently implemented using a conventional general purpose digital computer programmed according to the teachings of the present specification, as will be apparent to those skilled in the computer art. Appropriate software coding can readily be prepared by skilled programmers based on the teachings of the present disclosure as will be apparent to those skilled in the software art. In particular, the computer program
10 product for remote managing print jobs according to the present invention can be written in a number of computer languages including but not limited to C, C++, Fortran, and Basic, as would be recognized by those of ordinary skill in the art. The invention may also be implemented by the preparation of applications specific integrated circuits or by interconnecting an appropriate network of conventional component circuits, as will be readily
15 apparent to those skilled in the art.

 Obviously, numerous additional modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims the present invention may be practiced otherwise than as specifically described herein.

WHAT IS CLAIMED AS NEW AND DESIRED TO BE SECURED BY LETTERS
PATENT OF THE UNITED STATES IS:

1. A method of managing a print job, comprising the steps of:

transmitting print job information to a printer;

5 storing said print job information in a storage device separate from said printer;

prompting a user to enter identification information at a computer separate from said
printer; and

comparing said identification information with information stored in said storage
device.

10 2. The method of Claim 1, wherein transmitting said print job information to said
printer comprises sending said print job information from said computer.

3. The method of Claim 1, further comprising the steps of:

validating said identification information; and

displaying at least part of said print job information at said computer.

15 4. The method of Claim 3, further comprising the steps of:

editing said at least part of said print job information at said computer; and

updating said storage device with print job information edited in said editing step.

5. The method of Claim 4, further comprising the step of transmitting to said printer
said print job information edited in said editing step.

20 6. The method of Claim 3, further comprising the steps of:

editing said at least part of said print job information at said computer; and

transmitting to said printer print job information edited in said editing step.

7. The method of Claim 6, further comprising the step of replacing a first set of printing information with a second set of printing information when said second set includes a same identification information as said first set.

5 8. The method of Claim 7, further comprising the step of printing a document according to said second set of printing information.

9. A system for managing a print job, comprising:

means for transmitting print job information to a printer;

means for storing said print job information;

10 means for prompting a user to enter identification information at a computer separate from said printer; and

means for comparing said identification information with information stored in said means for storing.

15 10. The system of Claim 9, wherein said means for transmitting said print job information to said printer comprises means for sending said print job information from said computer.

11. The system of Claim 10, further comprising:

means for validating said identification information; and

means for displaying at least part of said print job information at said computer.

12. The system of Claim 11, further comprising:

20 means for editing said at least part of said print job information at said computer; and

means for updating said means for storing with print job information edited with said means for editing.

13. The system of Claim 12, further comprising:

means for transmitting to said printer said print job information edited with said
means for editing.

14. The system of Claim 11, further comprising:

means for editing said at least part of said print job information at said computer; and

5 means for transmitting to said printer said print job information edited with said
means for editing.

15. The method of Claim 14, further comprising:

means for replacing a first set of printing information with a second set of printing
information when said second set includes a same identification information as said first set.

10 16. The method of Claim 15, further comprising:

means for printing a document according to said second set of printing information.

17. A computer program product, comprising:

15 a computer storage medium and a computer program code mechanism embedded in
the computer storage medium for causing a computer to manage a print job, the computer
program code mechanism comprising:

a first computer code device configured to transmit print job information from said
computer to a printer separate from said computer;

a second computer code device configured to store said print job information in a
storage device separate from said printer;

20 a third computer code device configured to prompt a user to enter identification
information at said computer; and

a fourth computer code device configured to compare said identification information
with information stored in said storage device.

18. The computer program product of Claim 17, further comprising:

a fifth computer code device configured to validate said identification information;
and

a sixth computer code device configured to display at least part of said print job
information at said computer.

5 19. The computer program product of Claim 18, further comprising:

a seventh computer code device configured to edit said at least part of said print job
information at said computer; and

an eighth computer code device configured to update said storage device with print
job information edited with said seventh computer code device.

10 20. The computer program product of Claim 19, further comprising:

a ninth computer code device configured to transmit to said printer said print job
information edited with said seventh computer code device.

21. The computer program product of Claim 18, further comprising:

15 a seventh computer code device configured to edit said at least part of said print job
information at said computer; and

an eighth computer code device configured to transmit to said printer said print job
information edited with said seventh computer code device.

22. The computer program product of Claim 21, further comprising:

20 a ninth computer code device configured to replace a first set of printing information
with a second set of printing information when said second set includes a same identification
information as said first set.

23. The computer program product of Claim 22, further comprising:

a tenth computer code device configured to instruct said printer to print a document
according to said second set of printing information.

24. A graphical user interface for managing a print job from a computer, comprising:

a display of printing attributes transmitted to a printer separate from said computer;

an input to edit said printing attributes; and

5 a first push button configured to be selected so as to transmit printing attributes edited with said input to said printer and to a storage device separate from said printer.

25. The graphical user interface of Claim 24, wherein said window further comprises:

a first sub-window configured to display and receive printing orientation information;

a second sub-window configured to display and receive printing layout information;

10 and

a third sub-window configured to display and receive printing paper size information.

26. The graphical user interface of Claim 24, further comprising a second push button configured to be selected so as to end a print job managing sequence.

ABSTRACT OF THE DISCLOSURE

A method of managing a print job from a computer includes the steps of transmitting print job information to a printer, storing the print job information in a storage device separate from the printer, prompting a user to enter identification information at the computer, which is separate from the printer, and comparing the identification information with information stored in the storage device. The method can also include the steps of validating the identification information, displaying the print job information at the computer, editing the print job information at the computer, updating the storage device with edited print job information, and transmitting to the printer the edited print job information. The method can be implemented using a remote manager residing on a computer connected to the printer via a network. A computer program product, and a graphical user interface for managing a document server print job are also disclosed.

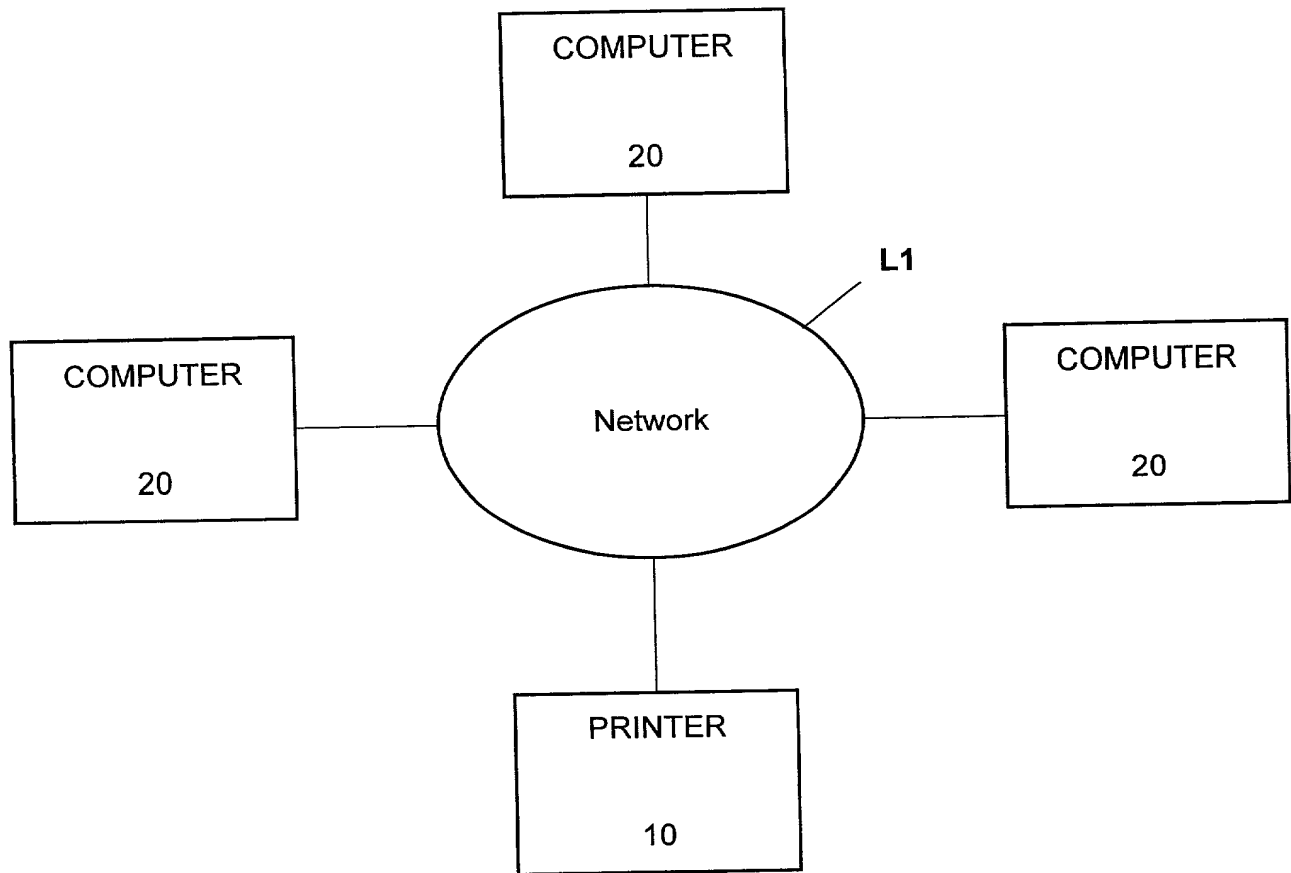


FIG. 1

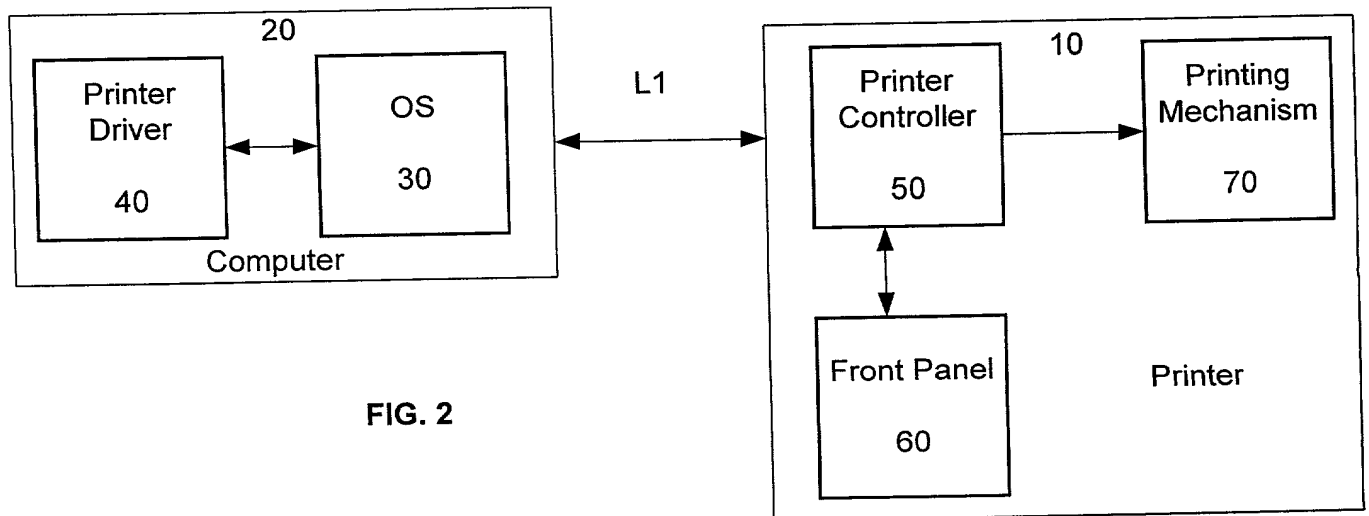


FIG. 2

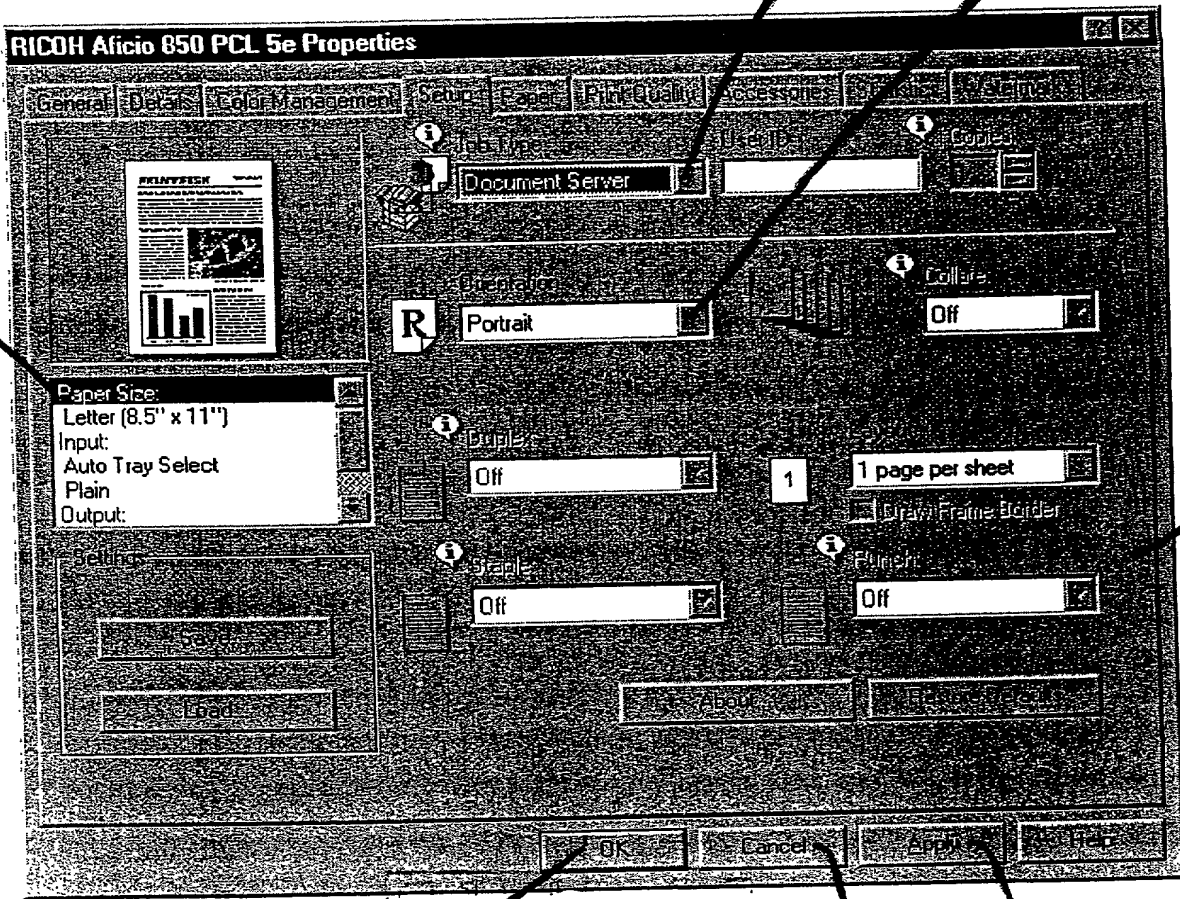


FIG. 3

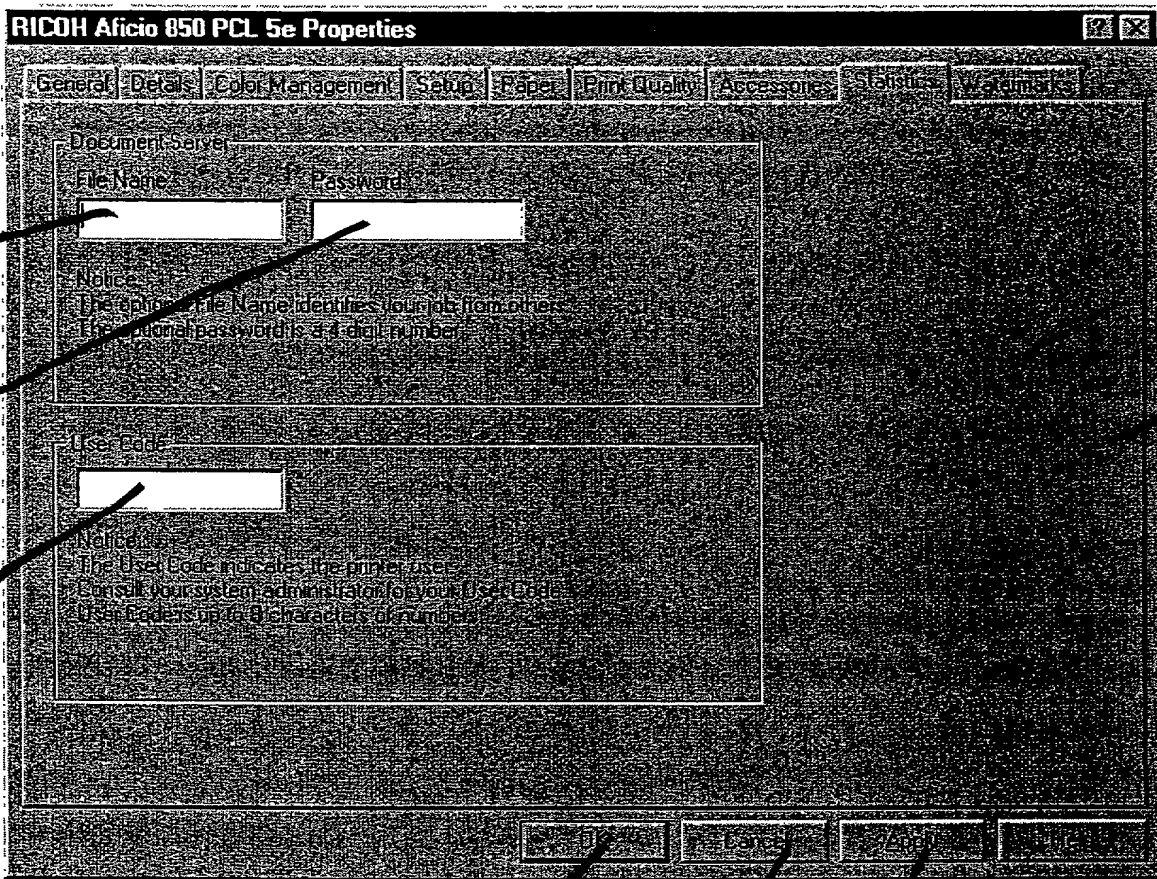


FIG. 4

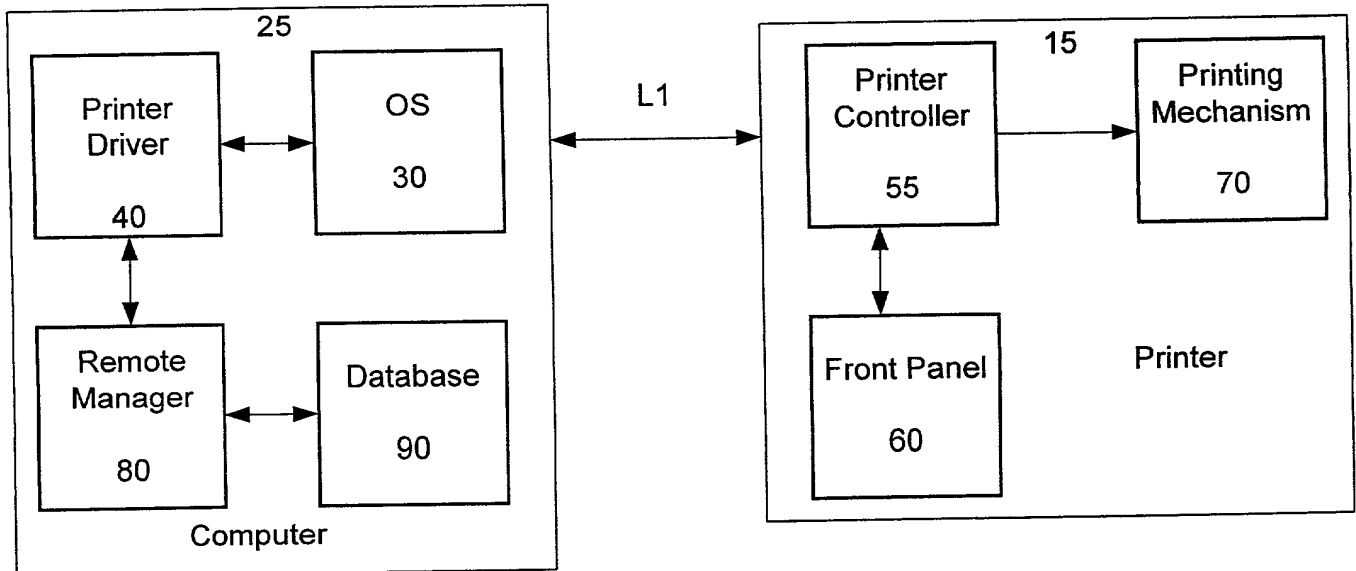


FIG. 5

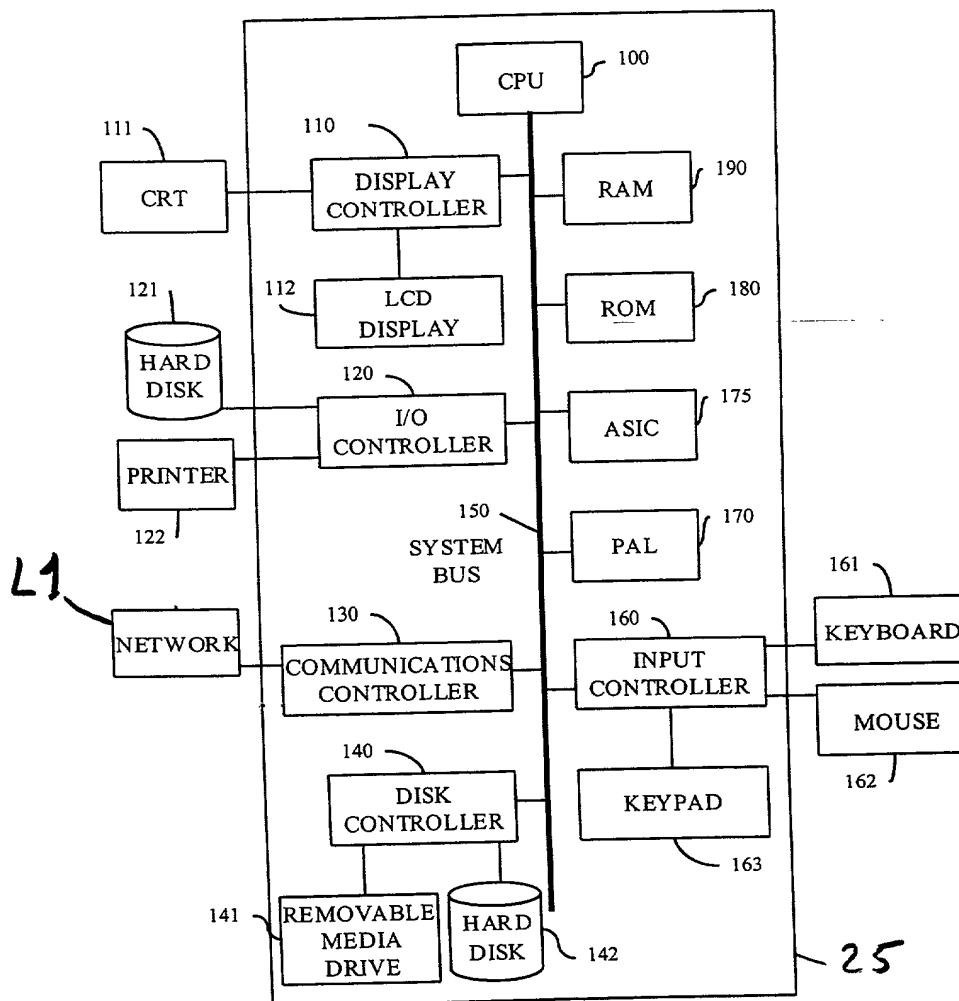


FIG. 6

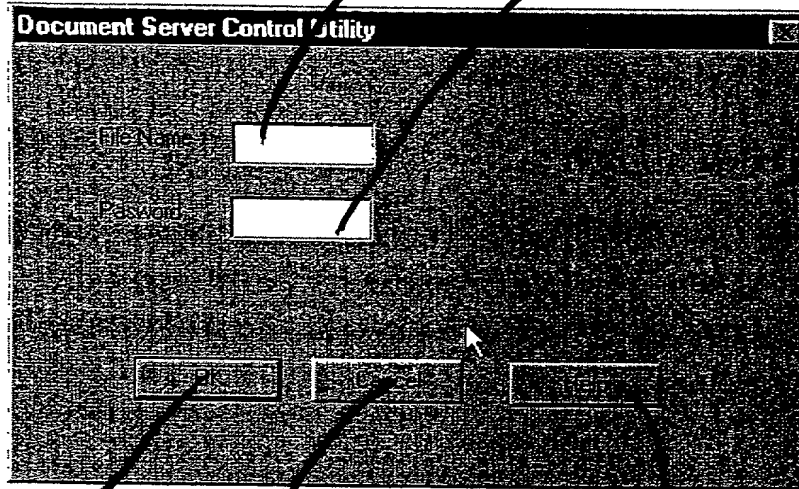


FIG. 7

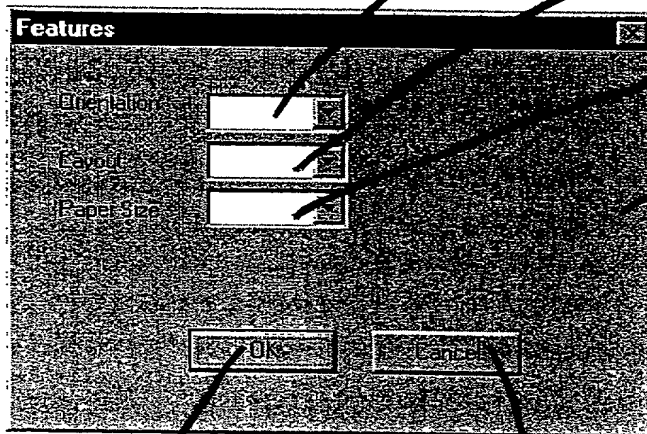


FIG. 8

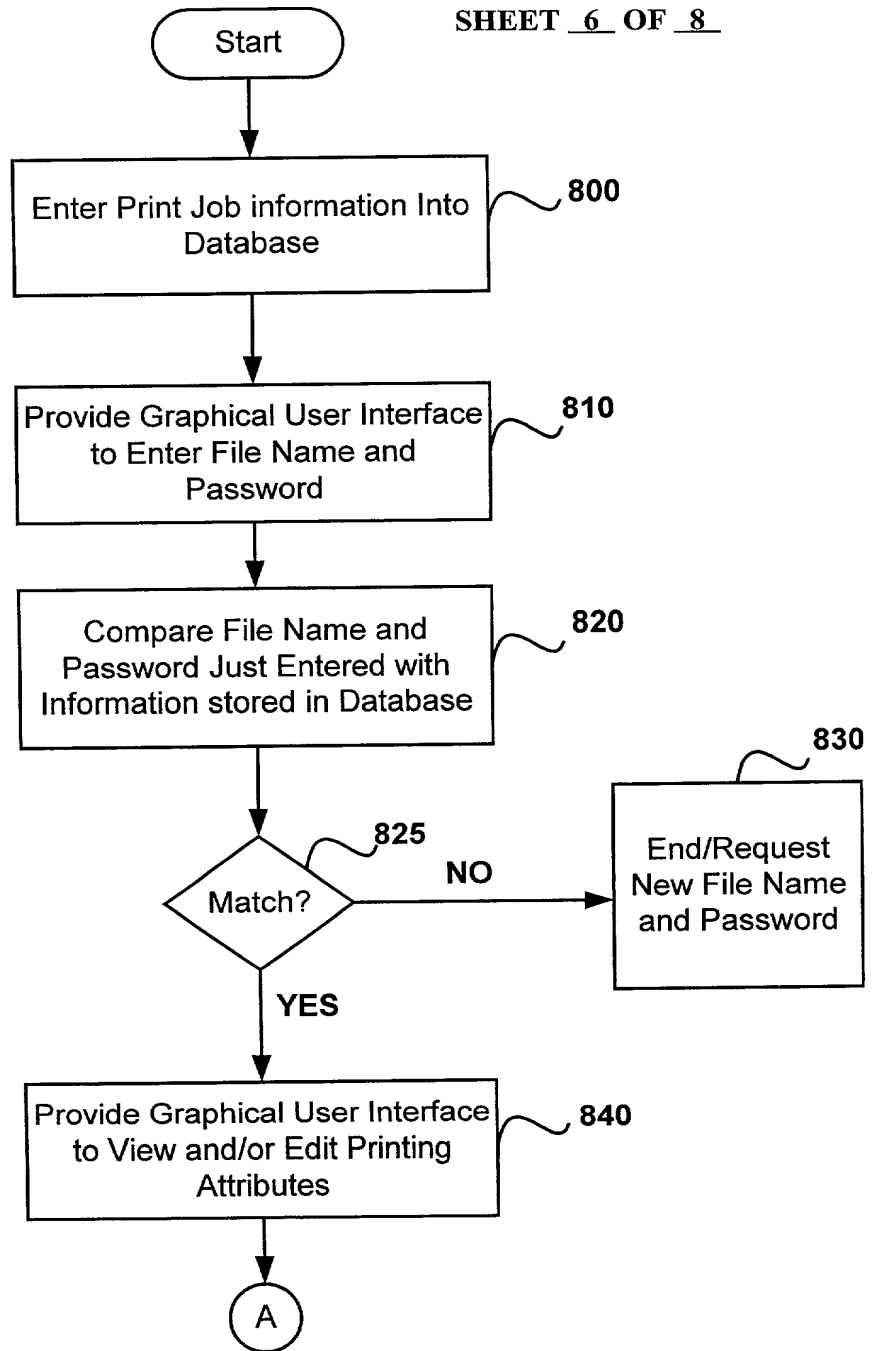


FIG. 9A

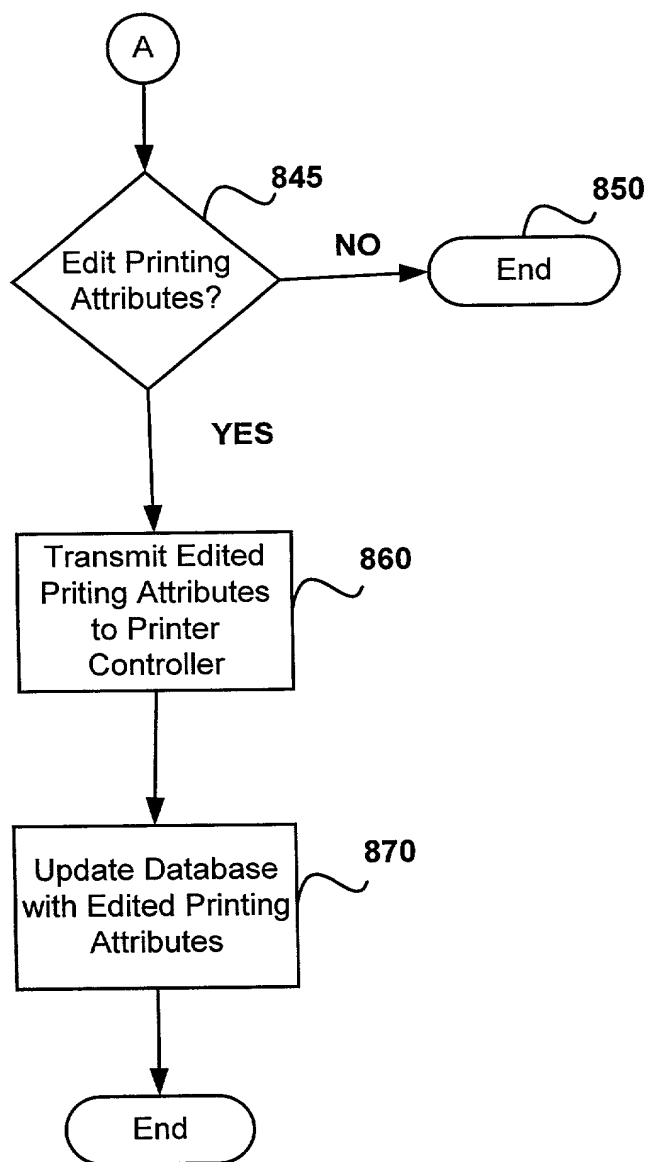


FIG. 9B

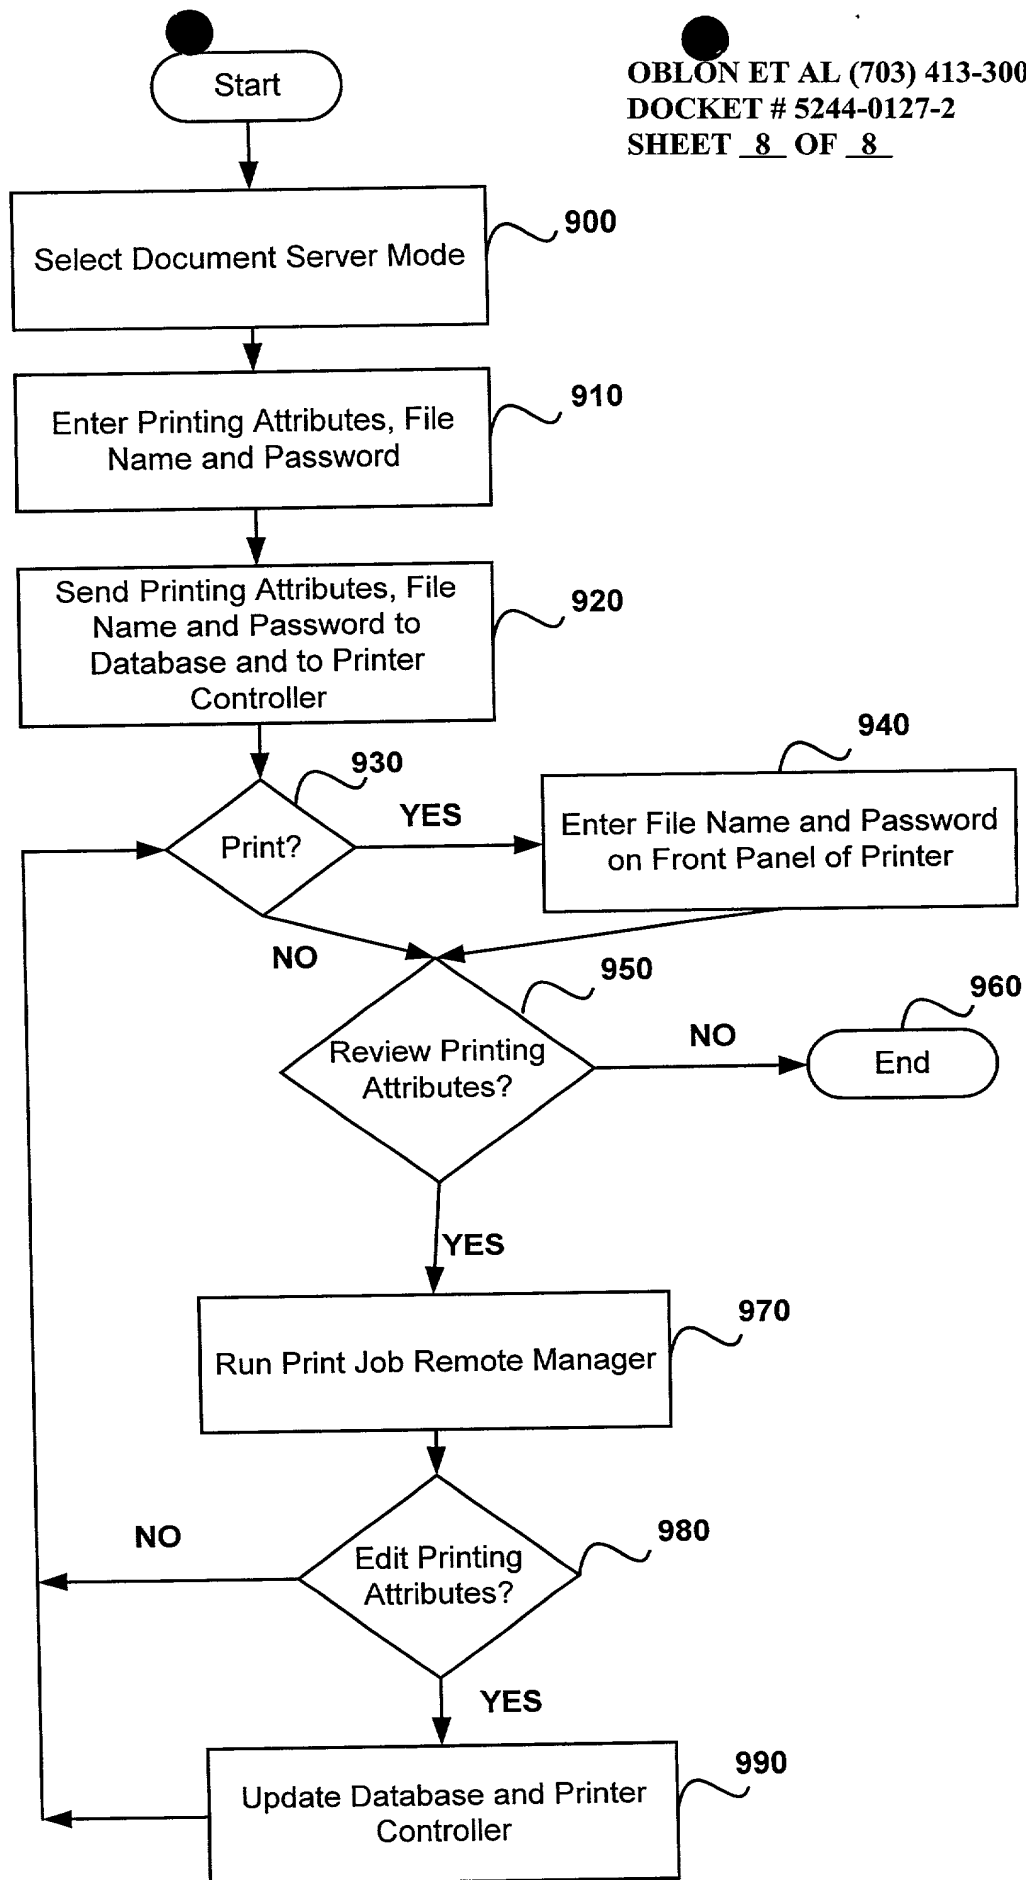


FIG. 10

Docket No. 5244-0127-2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Alan LIN

ATTN: APPLICATION PROCESSING DIVISION

SERIAL NUMBER: NEW APPLICATION

FILED: HERewith

FOR: SYSTEM, METHOD, AND COMPUTER
PROGRAM PRODUCT FOR REMOTE
MANAGING A DOCUMENT SERVER
PRINT JOB

SUBMISSION OF DECLARATION

Assistant Commissioner for Patents
Washington, D. C. 20231

Sir:


Applicants submit herewith a Rule 63 Declaration.

The Declaration enclosed herewith contains the Title of the Invention and Inventor(s) name(s) and is believed, in combination with the attorney statement set forth below, to adequately identify the above-identified application in accordance with 37 CFR 1.63, as set forth in MPEP Section 601.01.

The undersigned hereby states that the specification filed herewith is in fact the application which the Inventor(s) executed by signing the enclosed Declaration.

In light of the foregoing, the application is deemed to be complete and in condition for examination, and such favorable action is earnestly solicited.

Respectfully submitted,
OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P. C.



Gregory J. Maier
Attorney of Record
Registration No. 25,599
Philippe J. C. Signore
Registration No. 43,922

Fourth Floor
1755 Jefferson Davis Highway
Arlington, Virginia, 22202
(703) 413-3000
Fax No. (703) 413-2220
GJM:PJCS:les
(OSMMN 1/97)

Declaration, Power Of Attorney and Petition

Page 1 of 2

WE (I) the undersigned inventor(s), hereby declare(s) that:

My residence, post office address and citizenship are as stated below next to my name,

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

SYSTEM, METHOD, AND COMPUTER PROGRAM PRODUCT FOR REMOTE MANAGING A DOCUMENT

SERVER PRINT JOB

the specification of which

☒ is attached hereto.

☐ was filed on _____ as
Attorney Docket No. _____
~~Application Serial No.~~ 5244-0127-2
and amended on _____.

☐ was filed as PCT international application
Number _____
on _____,
and was amended under PCT Article 19
on _____ (if applicable).

We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application(s)

Application No.	Country	Day/Month/Year	Priority Claimed
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

We (I) hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

_____	_____
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

We (I) hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.	Filing Date	Status (pending, patented, abandoned)
_____	_____	_____
_____	_____	_____
_____	_____	_____

And we (I) hereby appoint: Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Jean-Paul Lavalleye, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrouch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Christina M. Gadiano, Reg. No. 37,628; Jeffrey B. McIntyre, Reg. No. 36,867; William T. Enos, Reg. No. 33,128; Michael E. McCabe, Jr., Reg. No. 37,182; Bradley D. Lytle, Reg. No. 40,073; and Michael R. Casey, Reg. No. 40,294; our (my) attorneys, with full powers of substitution and revocation, to prosecute this application and to transact all business in the Patent Office connected therewith; and we (I) hereby request that all correspondence regarding this application be sent to the firm of OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C., whose Post Office Address is: Fourth Floor, 1755 Jefferson Davis Highway, Arlington, Virginia 22202.


We (I) declare that all statements made herein of our (my) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Alan LIN

NAME OF FIRST SOLE INVENTOR

Residence: 237 Traminer Court

Fremont, California 94539



Signature of Inventor

Citizen of: USA

Post Office Address: Same as Above

5/18/2000

Date